


External Exterior BLOWERS

BEST exterior blowers perform exceptionally at minimal sound levels by moving the blower to an exterior wall or the roof. Exterior blowers handle the rigorous needs of professional-style cooktops and ranges. We crafted durable, sealed blower housings from weather-resistant aluminum that can be painted to match roof or wall color schemes. The table below will help identify an exterior blower matched to the heat output of the chosen range hood. See page 40 for more information on selecting the right blower for the user's range or cooking style.



BEST exterior blowers are installed at the duct termination point (roof or exterior wall), providing the greatest distance between the point of use and the blower.



Electrical connections to both the hood and the exterior blower are required.

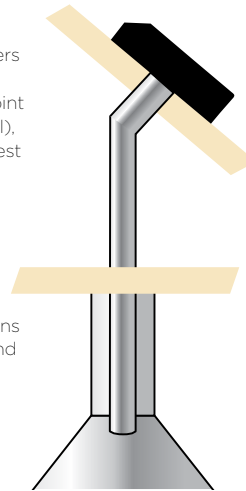



Exterior blowers may be vented through the roof or wall, with the goal of minimizing sharp turns in the duct that can impede airflow.

Series	EB9	EB15
Type	Exterior	Exterior
CFM maximum	840	1650
HVI Performance (High Speed)	840	1500
Duct Size ¹	10" round	10" round
Duct Direction	Vertical ⁴	Vertical ⁴
Backdraft Damper ²	Yes	Yes
Amps at 120V	5.7	4.3
Motor Type ³	Single Speed	Single Speed
Hood Compatibility ¹ with External Blower	HBC1 D49M UP26 WP28 All EX and E models	HBC1 D49M UP26 WPD39M All EX and E models

EB9



EB15



¹ Most "EX" & "E" models require a transition (model 414) from 8" to 10" for use with external blowers. BEST blowers are designed and UL Certified for use with BEST products only.

² In cold climates, a separate in-line damper (model 421) is recommended.

³ All BEST blower motors are thermal overload protected.

⁴ Exterior blower duct connection can be attached to the back (horizontal) of the WP28.